

Service Manual Trucks


Group **37**

Electrical Schematic:
Qual Comm with MCT

VNL, VNM

From Build Date 2.98

BATTERY 12 VOLT
IGNITION 12 VOLT
ACCESSORY 12 VOLT

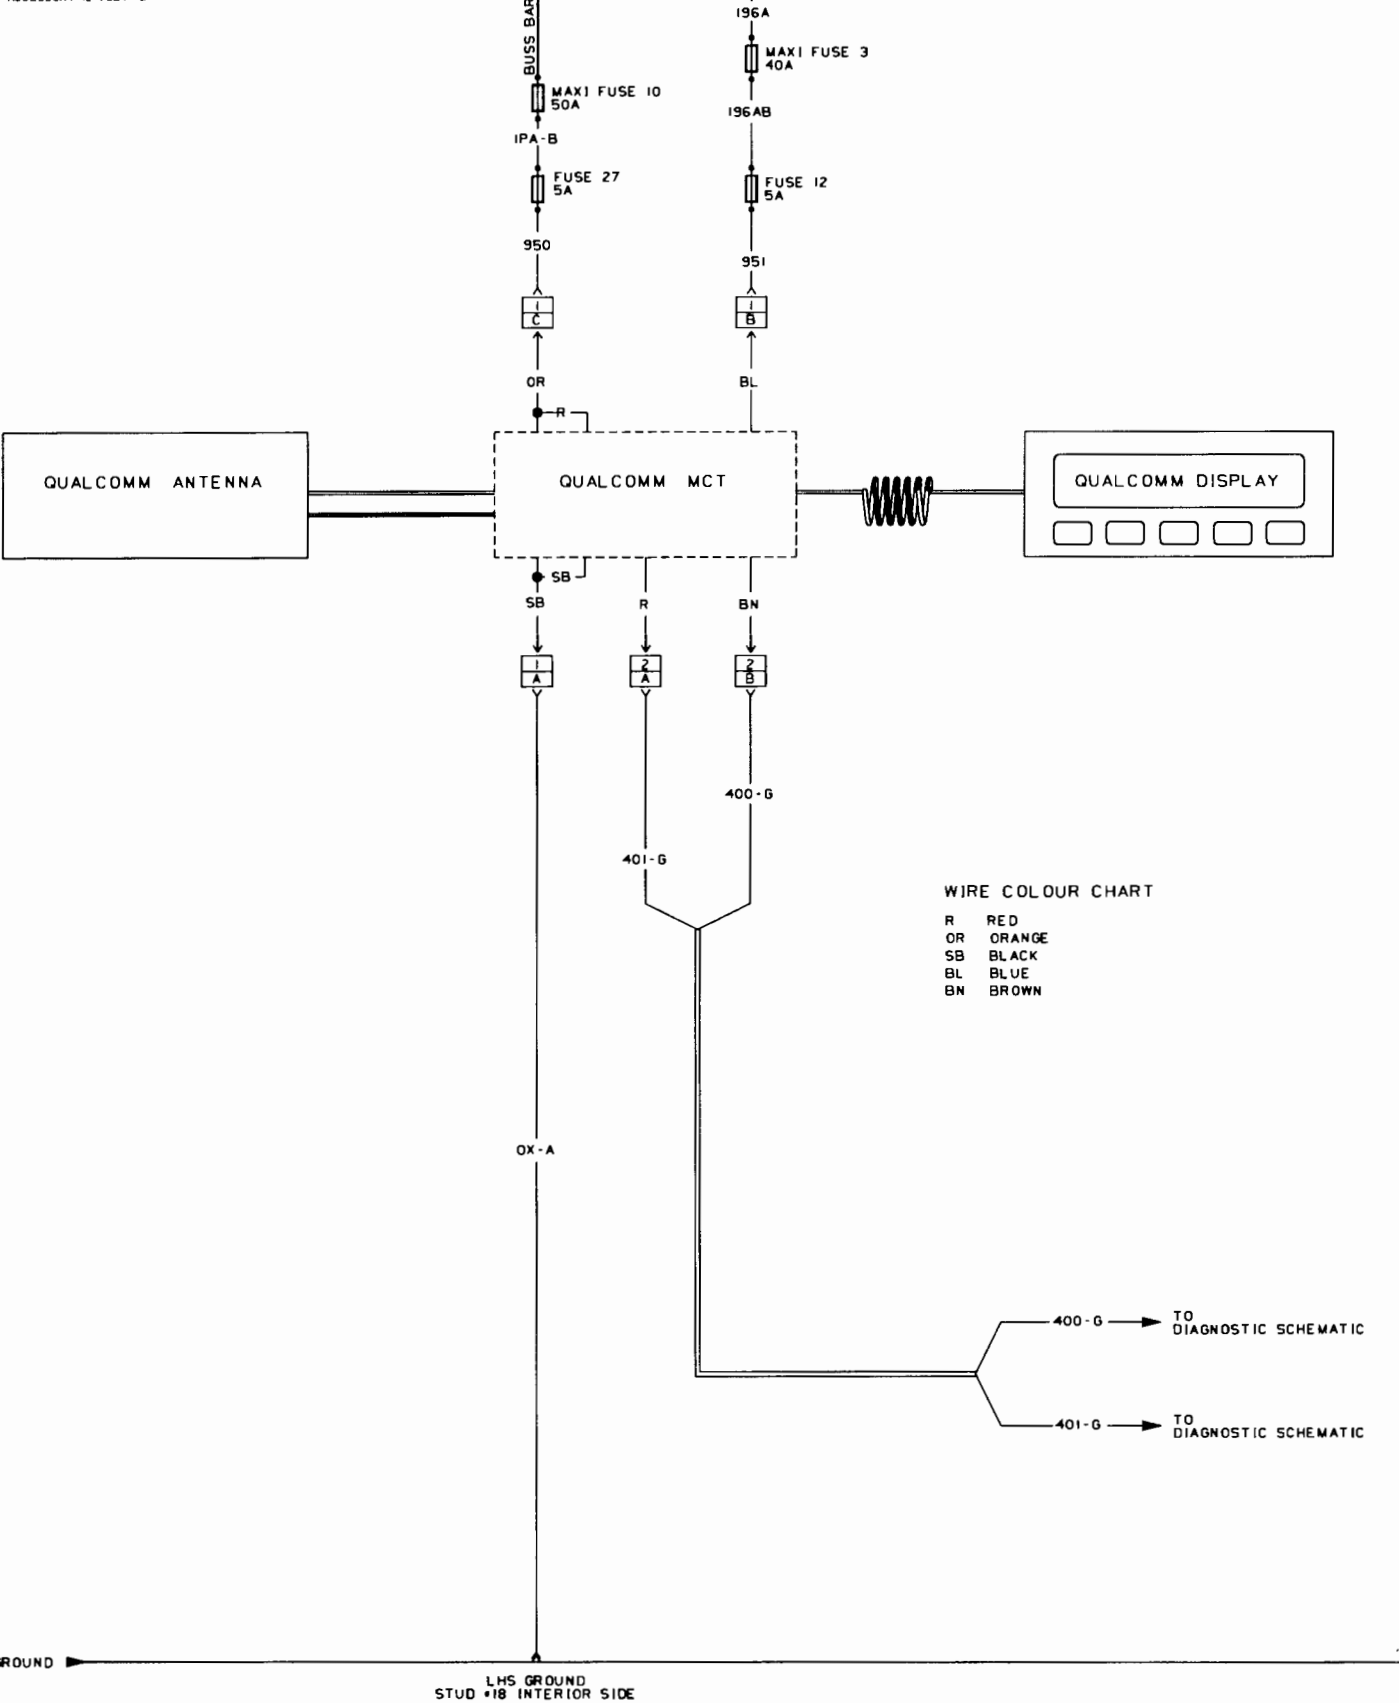

WIRE COLOUR CHART
R RED
OR ORANGE
SB BLACK
BL BLUE
BN BROWN

Qual Comm with MCT - VNL, VNM

CHANGE HISTORY

EFFECTIVE DATE	DESCRIPTION

CONNECTOR AND SPLICE INFORMATION
CONNECTORS VIEWED FROM CABLE ENTRY

CONNECTOR 1
QUALCOMM POWER CONNECTION MAIN CAB




TABLE OF CONTENTS		
CAVITY	CIRCUIT	FUNCTION
A	DX-A	GROUND
B	951	12 VOLT SUPPLY IGNITION
C	950	12 VOLT SUPPLY BATTERY

CONNECTOR 2
DIAGNOSTIC CONNECTION QUALCOMM










TABLE OF CONTENTS		
CAVITY	CIRCUIT	FUNCTION
A	401-G	INVERTED DATA LINK (1-1)
B	400-G	NONINVERTED DATA LINK (1-1)

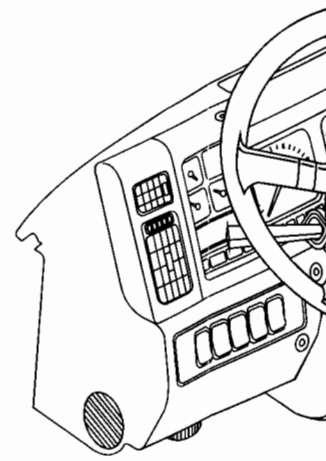


V850168


SYMBOL DEFINITION

DENOTES TWISTED PAIR: 
 DENOTES MALE TERMINAL: 
 DENOTES CONNECTOR: 
 DENOTES CAVITY: 
 DENOTES FEMALE TERMINAL: 

CHANGE HISTORY
DESCRIPTION

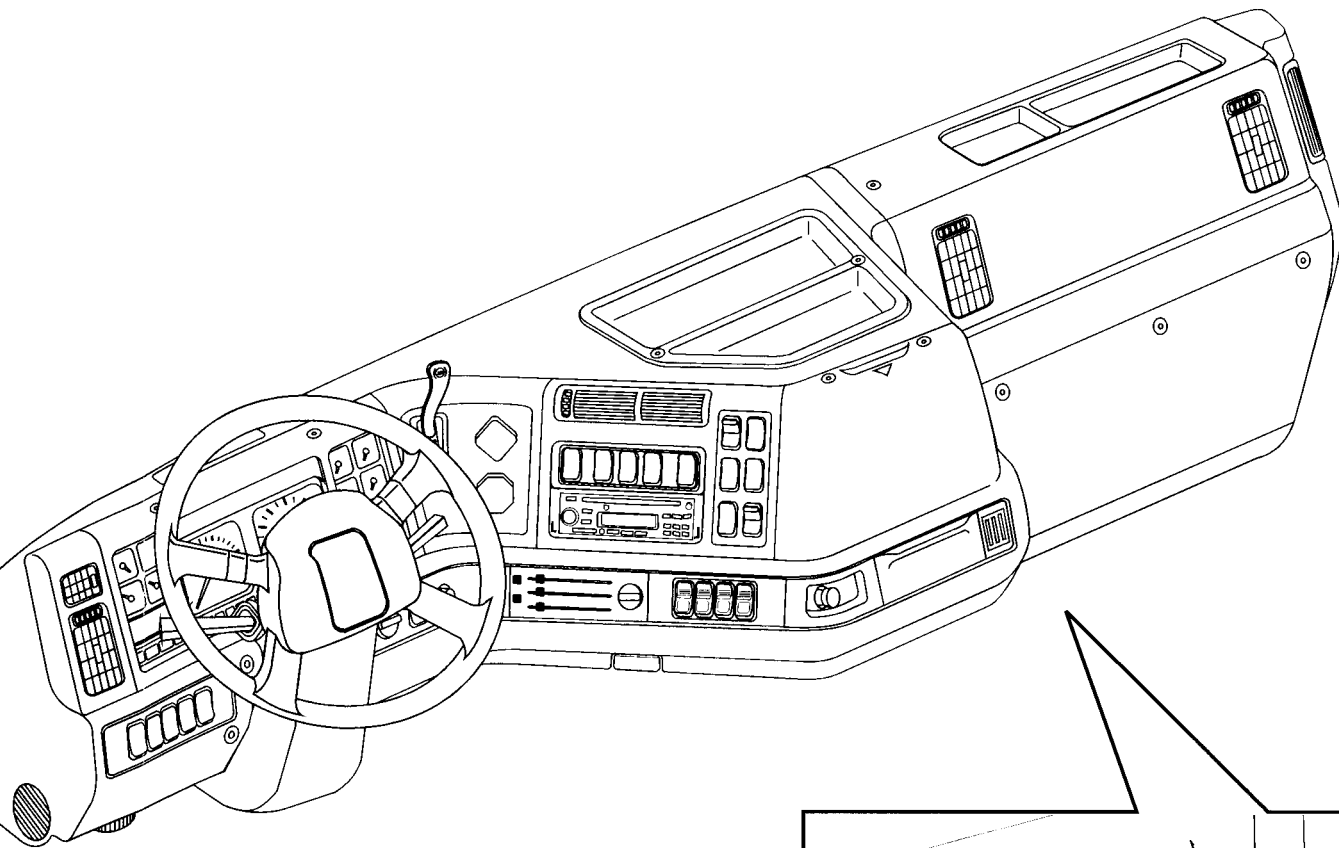

168

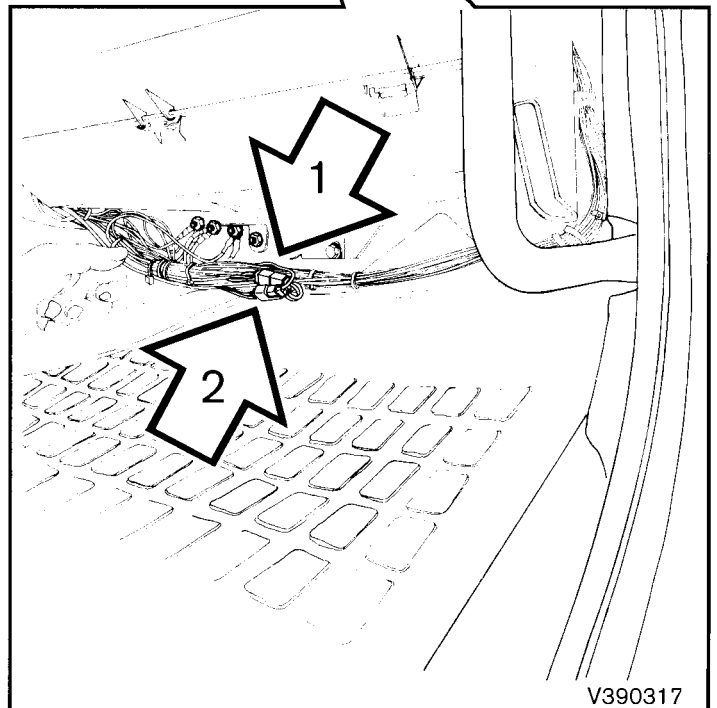

V390317