

# Service Manual Trucks

Group **37**


Electrical Schematic:

Back of Cab Lamp,

Dual Low


VNL, VNM

From Build Date 2.98




PV776-370-98211/1


**VOLVO**

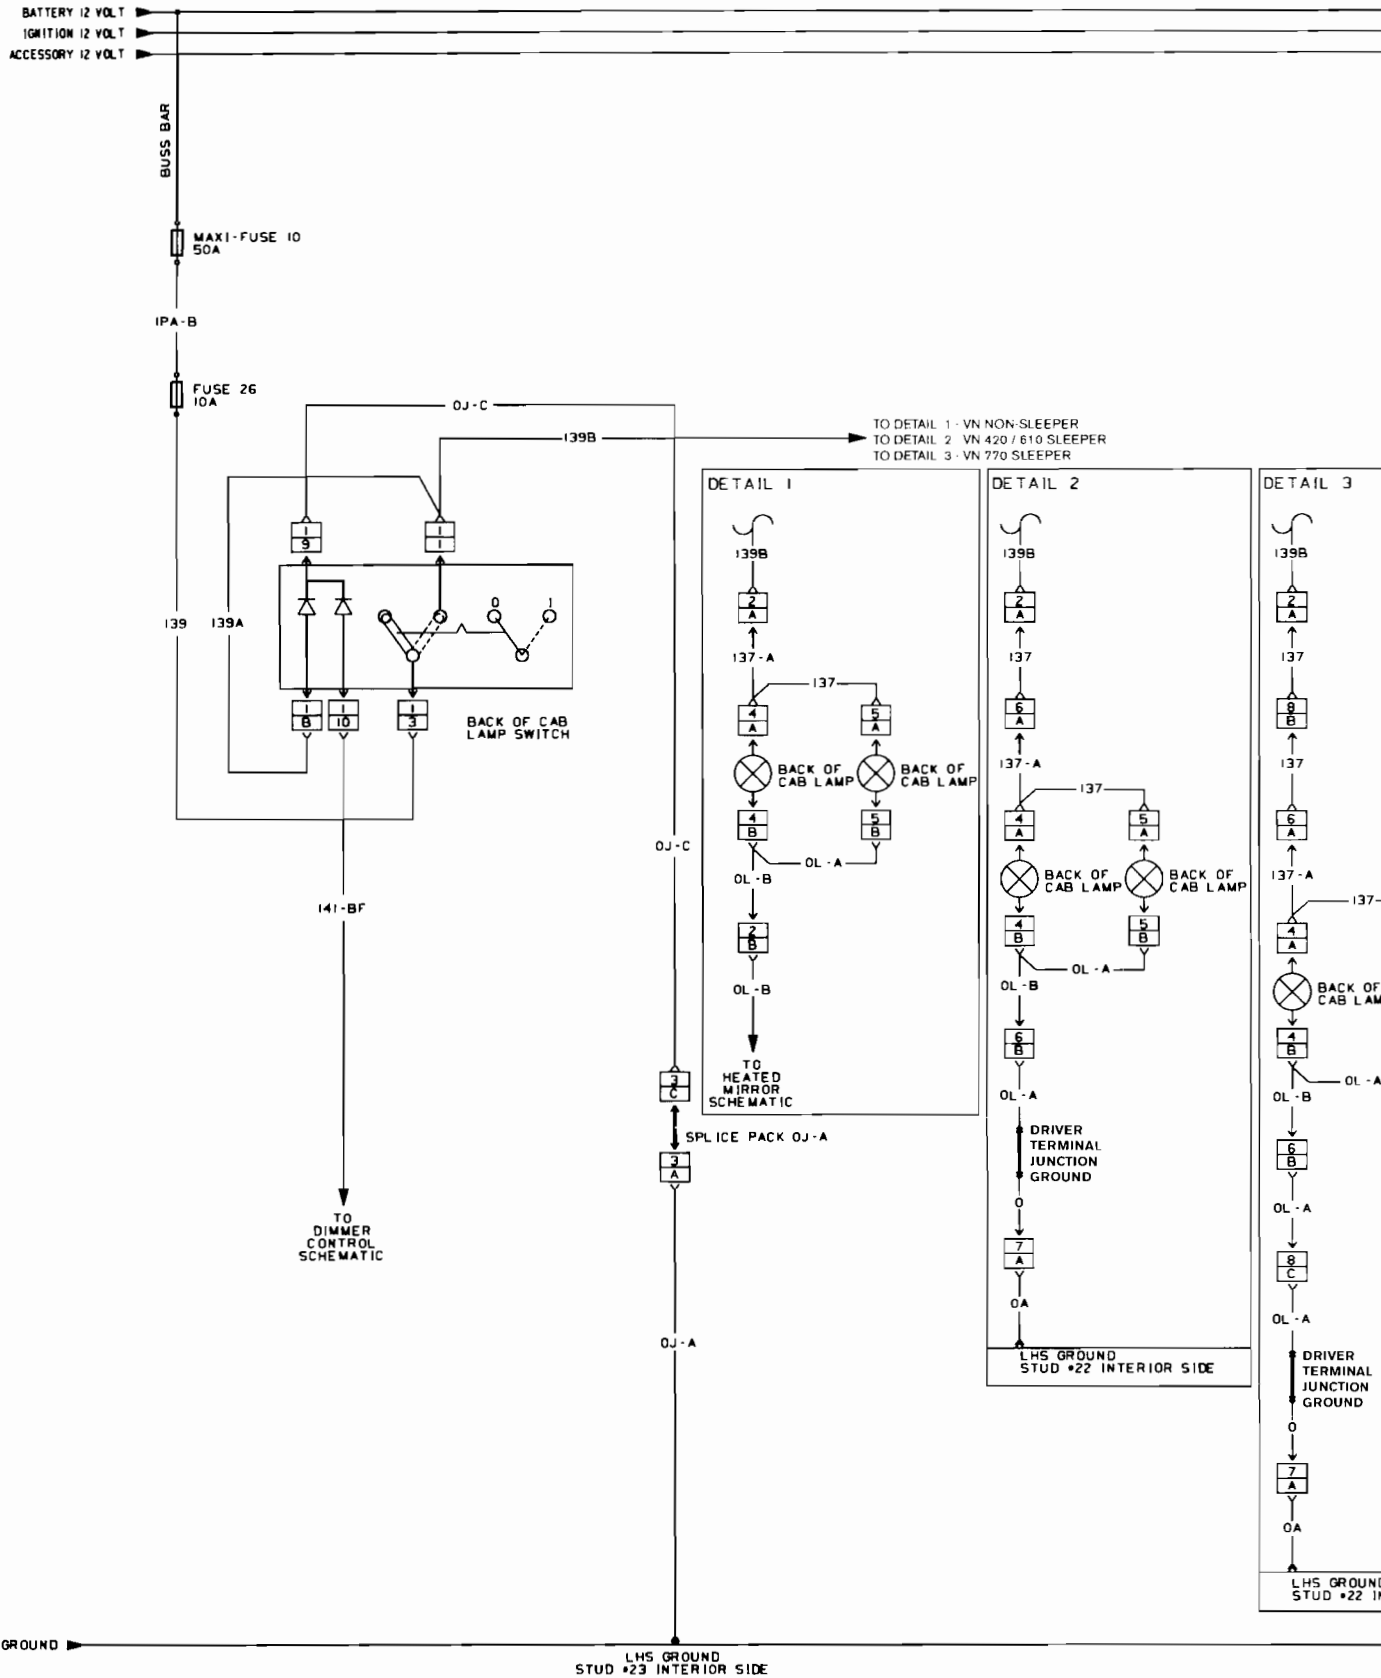

Back of Cab Lamp, Dual Low - VNL, VNM

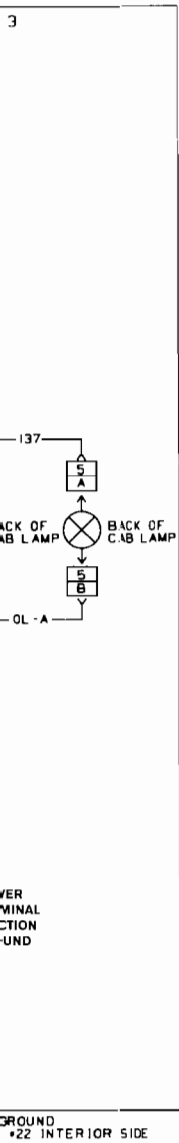

CONNECTOR AND SPLICE INFORMATION  
CONNECTORS VIEWED FROM CABLE ENTRY




**CONNECTOR 1**  
MAIN CAB HARNESS  
TO BACK OF CAB SWITCH

TABLE OF CONTENTS		
CAVITY	CIRCUIT	FUNCTION
B	139A	12 VOLT SUPPLY
I	139A/139B	12 VOLT SUPPLY
9	139	12 VOLT SUPPLY
9	OJ-C	GROUND
10	141-BF	TO RHEOSTAT



**CONNECTOR 2**  
CAB HARNESS TO BACK OF CAB LAMP

TABLE OF CONTENTS		
CAVITY	CIRCUIT	FUNCTION
A	139B	12 VOLT SUPPLY
B	OL-B	GROUND



**CONNECTOR 3**  
SPLICE PACK OJ-A

TABLE OF CONTENTS		
CAVITY	CIRCUIT	FUNCTION
A	OJ-A	GROUND
C	OJ-C	BACK OF CAB LAMP



**CONNECTOR 4**  
BACK OF CAB LAMP LOW DRIVER SIDE

TABLE OF CONTENTS		
CAVITY	CIRCUIT	FUNCTION
A	137/137-A	12 VOLT SUPPLY
B	OL-A/OL-B	GROUND



**CONNECTOR 5**  
BACK OF CAB LAMP LOW PASSENGER SIDE

TABLE OF CONTENTS		
CAVITY	CIRCUIT	FUNCTION
A	137	12 VOLT SUPPLY
B	OL-A	GROUND



**CONNECTOR 6**  
BUNK HARNESS TO BACK OF CAB LAMP

TABLE OF CONTENTS		
CAVITY	CIRCUIT	FUNCTION
A	137	12 VOLT SUPPLY
B	OL-A	GROUND




**CONNECTOR 7**  
BUNK HARNESS TO BACK OF CAB LAMP

TABLE OF CONTENTS		
CAVITY	CIRCUIT	FUNCTION
A	OA	GROUND




**CONNECTOR 8**  
BUNK HARNESS TO BACK OF CAB LAMP

TABLE OF CONTENTS		
CAVITY	CIRCUIT	FUNCTION
B	137	12 VOLT SUPPLY
C	OL-A	GROUND



EFFECTIVE DATE	DESCRIPTION

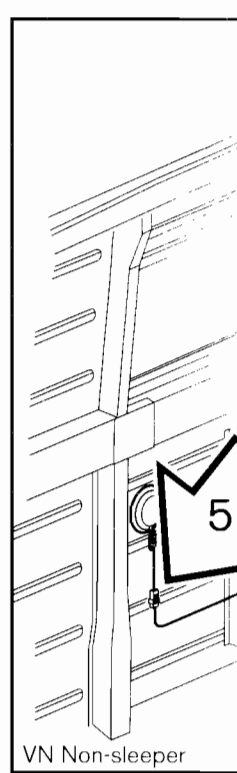

CHANGE HISTORY	
NO.	DESCRIPTION

